













Mounting instructions for Ultra Short Throw Projector Mount
Maximum projector fixing points - 300mm X 300mm
0 - 535mm Throw Length - Up to 25Kgs

Model No.
PMVULTRASHORT

Factory No.
Z0876UST

Read these instructions carefully before installing your equipment.
Install the mount in a suitable location using fixings which are appropriate for the wall material and structure. Consult a qualified builder if you're in any doubt as to the structural integrity of the wall.
Do not attempt to alter or modify any part of the wall mount or its attachments.
Do not use if any parts are broken or appear to be damaged.
Tighten all bolts and fixings securely. Only use fixings provided with this bracket.
Do not mount your TV close to sources or heat or moisture.
Always have a minimum of two persons to install the projector on to the mount..

Universal Projector Fixing Kit


	D - M3 x 10mm	E - M3 x 25mm	x4
	F - M4 x 10mm	G - M4 x 25mm	
	H - M5 x 10mm	I - M5 x 25mm	
	J - M6 x 10mm	K - M6 x 25mm	
	L - M3 Washer	M - M5 Washer	x4
	N - M4 Washer	O - M6 Washer	
	P - M5 x 10mm		x4
	Q - M5 x 5mm		
	R - M6 x 15mm		
	S - Extension Arm		x4
	T - M5 x 10mm		x4
Also Required			

1 Attach Projector Mount to Wall

For ease of installation mount bracket on wall using position 1 and mark other positions using a spirit level. Then remove fixing from position 1, remove bracket and drill other positions. Use Fixings suitable for your type of wall construction. Use All available fixing points.
If in any doubt of the suitability of the wall, it's construction or what type of fixings to use, consult a qualified builder or installer.

CAUTION NOTE!


This mount is designed to take projectors up to a weight of 15Kgs. For safety reasons the mount has been tested with a dead weight loading of 75Kgs. It is recommended that if the installation is at risk of being subjected to greater loads then you should additionally tether the mount to the ceiling using the tether point (highlighted below). The tether point uses an M6 thread which can accept any M6 fixing such as an eye bolt or hook.

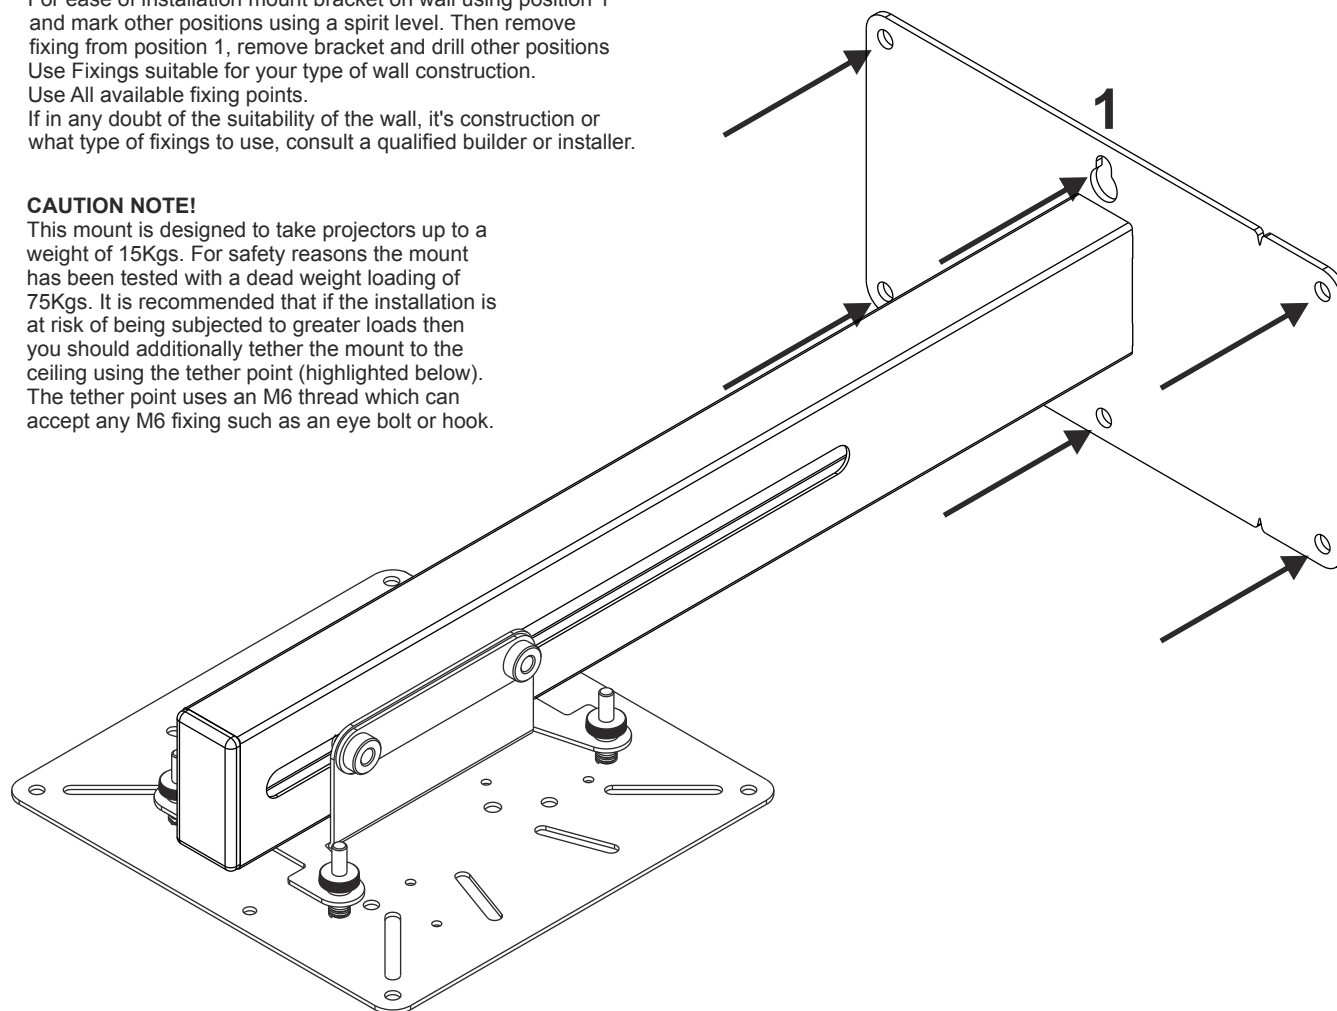

3


Adjust Length of Mount

To set the length and tilt of the mount, loosen bolts, slide mount to required position and re-tighten bolts.

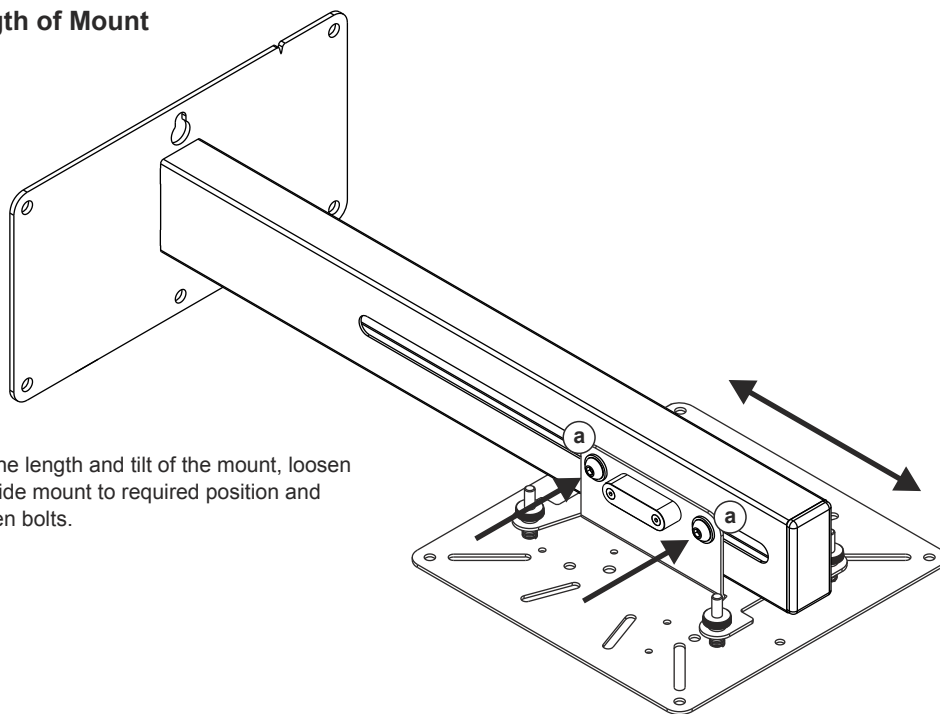

4

Attach Projector Fixing Arms if Required and Attach Projector

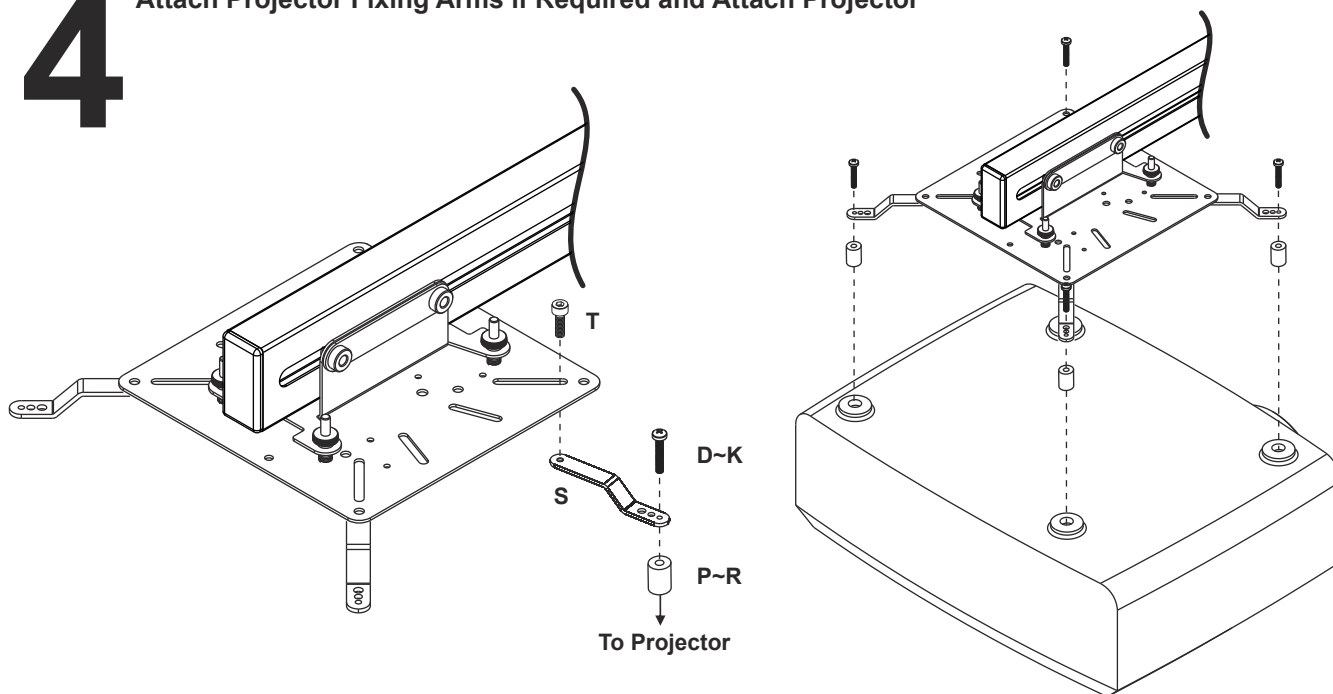

5

Fine Adjust Position

a To fine tune the length and tilt of the mount, loosen bolts, slide mount to required position and re-tighten bolts.

b To fine tune the level of the projector use the four adjustment thumb wheels on the spring loaded cradle. Do not fully unwind the thumb wheels.

c The integrated level indicates that the mount arm is at 0°.

This does not necessarily mean the projector is level with the screen so other adjustments may need to be made.

